

Honeywell
MILLER®



**New Honeywell Miller® TurboLite™ Edge
Self-Retracting Lifeline**

Do You Know Where Your Edges Are?

In work sites of every variety, edges are much more common than people realize – and they may pose a greater risk than you'd expect.

Whether you're laying roofing, traversing a beam, or simply working near the unprotected sides of an upper floor, falls over an edge may be more hazardous than other falls.

Without protection designed for edges, traditional lifelines risk being severed and the force upon the worker in the event of a fall is significantly increased. Honeywell estimates that as many as 80% of fall-protection users have applications in which a lifeline will come in contact with an edge in the event of a fall.

Edges in Fall Protection Applications

Edge Applications
≥ 0.5mm

Edge Tested Standards

Meets the most stringent edge-tested standards:

- Compliant to EN360-type B, VG11 (Rev 08) edge tested, datasheet CNB/P/11.060

Honeywell Has Your Back: TurboLite™ Edge Series

Extensive series of Honeywell Miller TurboLite Self-Retracting Lifelines (SRL) is even more versatile with the introduction of the TurboLite Edge Series.

Whether you work in construction, industrial, or even wind power, units for edges will help you ensure workers are safe in applications requiring foot-level tie-off or work near edges.

Make Confidence Your True Edge

TurboLite™ Edge SRLs are engineered to deliver the assurance you expect from Honeywell Miller Fall Protection in a wide range of lengths with innovative features:

Safe – Models include an integral shock absorber to keep the lifeline intact in the event of a fall over an edge.

Versatile – Can be connected at foot-level and above for workers up to **140kg**.

Compact and Lightweight – Reduce user fatigue, increase productivity.

Simple – Easy to install, easy to use.

Configurable – A wide range of working lengths featuring cable, web, options with a variety of lifeline connectors.

Reduced fall clearance compared to a shock-absorbing lanyard – Effective solution for applications with limited fall clearance.

Durability – High-impact nylon housing and abrasion-resistant webbing.

Superior Mobility – Integral swivel design increases worker mobility and prevents lifeline from twisting.

Twin models available – Provide for 100% tie-off connection.

The Versatility You Need. The Safety You Depend On.

Designed for performance in edge applications, TurboLite™ Edge SRLs offer versatility, enhanced user mobility and maximum safety.

What's in It for Me?

- Provides the user with protection designed for edges eliminating the risk of your lifeline being severed and reducing the force that could result in the event of a fall.
- Keeps the user safe in applications that require anchoring at foot-level.
- Perfectly suits the user's personal profile, with the capacity to support user weights up to 140 kg in all connections at foot-level and above.
- Cable Leading Edge units meet the most stringent safety standards: CNB/P/11.062-rev 06 - Higher user weight 140 kg; CNB/P/11.060-rev 08 - Horizontal use; CNB/P/11.085-rev 03 - Use with an attachment point at the foot level.



Honeywell Miller TurboLite™ Edge

Competitive Advantages

Maximizes versatility for virtually any short-range application

The TurboLite Edge offering includes working lengths from 2,75m to 3,65m to accommodate a variety of applications.

Provides protection for a wider range of workers

With a 140 kg weight capacity for all connections down to foot-level, Honeywell Miller TurboLite™ Edge takes adaptability to new heights.

Enables quicker, easier installation

Forget about pin buttons that are difficult to operate, and the troublesome need to connect the shock-absorber to the harness. One pin connection, a single click and you can focus on the task at hand.

Creates a better worker experience

Lightweight, compact harness connector with free-floating shock absorber pack keeps worker cooler, and provides a more comfortable work experience.

Increases safety

Two buttons on harness connector, two different planes and two distinct actions provide the safest choice to prevent accidental disengagement. A red indicator line gives a warning if the pin is not properly engaged.

Lowers cost of ownership

Durable pin activation buttons and ballistic nylon shock absorber cover along with the ability to replace a damaged unit results in a decreased cost of ownership.

Ensures compatibility with all harnesses

The product is compatible with all Honeywell Miller harnesses, without any add-ons. No cumbersome straps to attach to the harness or special connectors are required for different harness sizes or configurations.



Safety, Mobility, and Comfort.

Lightweight ,User-Friendly Harness Connector

A lightweight edge connector increases productivity by reducing worker fatigue. Effortless pin action allows for quick, easy installation, without the need to attach any additional straps.

First-Rate Connector Durability

Corrosion and abrasion resistant anodized aluminum results in a longer product life and lowers the cost of ownership.

High-Impact Resistant Nylon Housing

Provides ultimate durability extending product's service life.

Lifeline Reliability

Galvanized cable (for Extreme units) and Spectra® webbing are highly resistant to abrasion, cutting, and caustic chemicals.

Efficient Tracking

An Ultra-High Frequency RFID enables asset and inspection tracking.

Free-Floating Shock Absorber

Acting as a pad between the units and the worker, the freefloating shock absorber keeps the worker cooler, conveying great comfort and wearability.

Great Mobility

Swivel connectors on units and free-floating harness connector allow for excellent maneuverability in any working environment.

Durable Entry Guide Bushing

Comprised of an oil impregnated composite, the entry guide bushing protects the lifeline and housing from wear, lengthening the life of the product and minimizing the cost of ownership.



Lifeline Connectors



Snaphook Steel with Swivel
Opening - 19 mm



Scaffhook Steel with Swivel
Opening - 63 mm



Snaphook Aluminum with Swivel
Opening - 19 mm



Twistlock Aluminum with Swivel
Opening - 22 mm




Scaffhook Aluminum with Swivel
Opening - 63 mm

Cable Lifeline for Edge Applications

TurboLite™ EXTREME

- Designed for use in edge applications with radius $\geq 0,5\text{mm}$
- Certified to EN360: 2002, VG11 (Rev 08) edge tested, compliant with datasheet CNB/P/11.060
- Galvanized cable lifeline
- Available in length of 2,75m
- Single and twin configurations
- Variety of lifeline connector options

| Ref | Length (m) | Configuration | Material | Harness Connector | Anchorage Connector |
|-----------|------------|---------------|----------|-------------------|-----------------------------|
| 1035728-E | 2,75 | Single | Cable | Pin | Snaphook Steel with Swivel |
| 1035729-E | 2,75 | | Cable | Pin | Scaffhook Steel with Swivel |
| 1035731-E | 2,75 | | Cable | Pin | Twistlock Alu with Swivel |
| 1035732-E | 2,75 | | Cable | Pin | Scaffhook Alu with Swivel |
| 1035733-E | 2,75 | Twin | Cable | Pin | Snaphook Steel with Swivel |
| 1035734-E | 2,75 | | Cable | Pin | Scaffhook Steel with Swivel |
| 1035735-E | 2,75 | | Cable | Pin | Twistlock Alu with Swivel |
| 1035736-E | 2,75 | | Cable | Pin | Scaffhook Alu with Swivel |

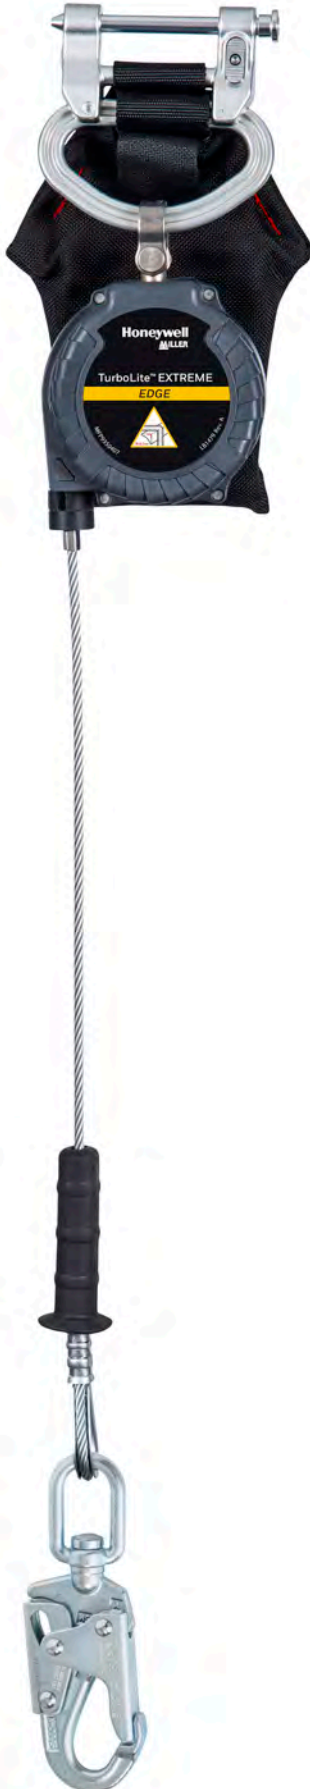



Webbing Lifeline for Edge Applications

TurboLite™ EDGE

- Designed for use in edge applications with radius $\geq 0,5\text{mm}$
- Certified to EN360: 2002, VG11 (Rev 08) edge tested, compliant with datasheet CNB/P/11.060.
- Honeywell Spectra® webbing lifeline provides outstanding chemical, abrasion, and cut resistance
- Available in lengths of 2,75m & 3,65m
- Single and twin configurations
- Variety of lifeline connector options

| Ref | Length (m) | Configuration | Material | Harness Connector | Anchorage Connector |
|-----------|------------|---------------|----------|-------------------|---------------------------|
| 1035741-E | 2,75 | Single | Web | Pin | Snaphook Alu with Swivel |
| 1035743-E | 2,75 | | Web | Pin | Scaffhook Alu with Swivel |
| 1035742-E | 2,75 | | Web | Pin | Twistlock Alu with Swivel |
| 1035745-E | 2,75 | Twin | Web | Pin | Snaphook Alu with Swivel |
| 1035747-E | 2,75 | | Web | Pin | Scaffhook Alu with Swivel |
| 1035746-E | 2,75 | | Web | Pin | Twistlock Alu with Swivel |
| 1035749-E | 3,65 | Single | Web | Pin | Snaphook Alu with Swivel |
| 1035751-E | 3,65 | | Web | Pin | Scaffhook Alu with Swivel |
| 1035750-E | 3,65 | | Web | Pin | Twistlock Alu with Swivel |
| 1035753-E | 3,65 | Twin | Web | Pin | Snaphook Alu with Swivel |
| 1035755-E | 3,65 | | Web | Pin | Scaffhook Alu with Swivel |
| 1035754-E | 3,65 | | Web | Pin | Twistlock Alu with Swivel |



Honeywell Safety Products

United Kingdom

Honeywell Safety Products Uk Ltd

Edison Rd
Basingstoke RG21 6QD
United Kingdom
Phone: +44 (0) 1256 693 200
Fax: +44 (0) 1256 693 300
Email: info-uk.hsp@honeywell.com

International

Honeywell Safety Products Europe SAS

Immeuble Edison Paris Nord 2
33, rue des Vanesses – CS 55288 Villepinte
95958 Roissy CDG Cedex – France
Phone: +33 (0)1 49 90 79 79
Fax: +33 (0)1 49 90 71 04
Email: info-export.hsp@honeywell.com

www.honeywellsafety.com

11-18-968 GB - 12/2018
© 2018 Honeywell International Inc.

Honeywell
MILLER®